




## Banding

Insulation Banding is supplied in 3003/1050 Aluminium, 304/316 Stainless Steel and Galvanised Steel in various widths and thicknesses, eg 9.5mm, 12.7mm, 25.4mm, 40.0mm and 50.8mm. Banding is supplied in catchweight coils varying between 15-25 kgs, or in coils 2kgs and 5kgs. (Subject to a decoiling charge).

Approximate mtr/kg are as follows:

Size	Stainless Steel	Aluminium
3/8" 9.5mm x 0.5mm	25 mtr/kg	74 mtr/kg
1/2" 12.7mm x 0.5mm	19 mtr/kg	57 mtr/kg
5/8" 16.0mm x 0.5mm	16 mtr/kg	44 mtr/kg
3/4" 19.0mm x 0.5mm	13 mtr/kg	37 mtr/kg
1" 25.4mm x 0.9mm	6 mtr/kg	16 mtr/kg
1 1/4" 40.0mm x 0.9mm	4.5 mtr/kg	10 mtr/kg
2" 50.8mm x 0.9mm	2.7 mtr/kg	8 mtr/kg

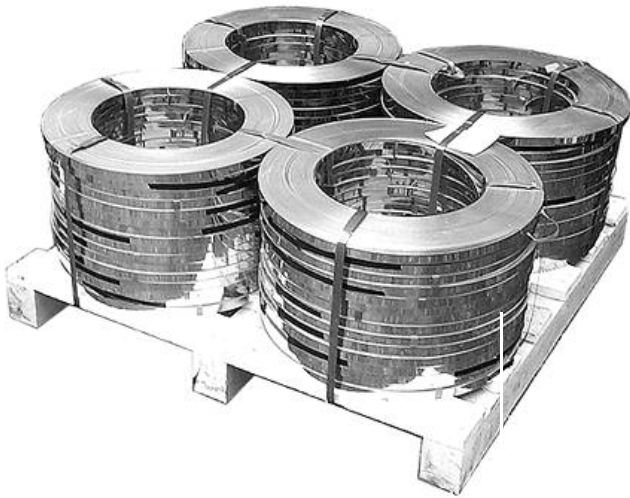

### Sealumet (Australia) Pty Limited

Mailing Address : PO Box 2218, Warwick, Perth, WA, 6024

Warehouse : Unit 2, 6 Langar Way, Landsdale, Perth, WA - 6065

Telephone : +618 6201 6153, Fax : +618 9303 4560

E-mail: [enquiries@sealumet.com](mailto:enquiries@sealumet.com) Website: [www.sealumet.com](http://www.sealumet.com)

#### DISCLAIMER

These data sheets are based on specifications, data and test results at time of publication. No guarantee as to completeness, accuracy or results is either expressed or implied. The suitability for an intended use is the responsibility of the user. As choice of material, method of application and site conditions are beyond our control we accept no liability for direct or consequential damages. Any material proved to be defective within the published shelf life\* will be replaced. \*From date of supply.



Epic Maintenance Limited